





DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R3W
1/4
SEC 31
U.S.B.&M.

| LINE | BEARING | DISTANCE |
|------|---------------|----------|
| L1 | N 36°48'51" W | 44.27' |
| L2 | S 63°29'43" W | 24.16' |
| L3 | S 16°08'23" E | 23.48' |
| L4 | N 61°43'08" E | 42.62' |

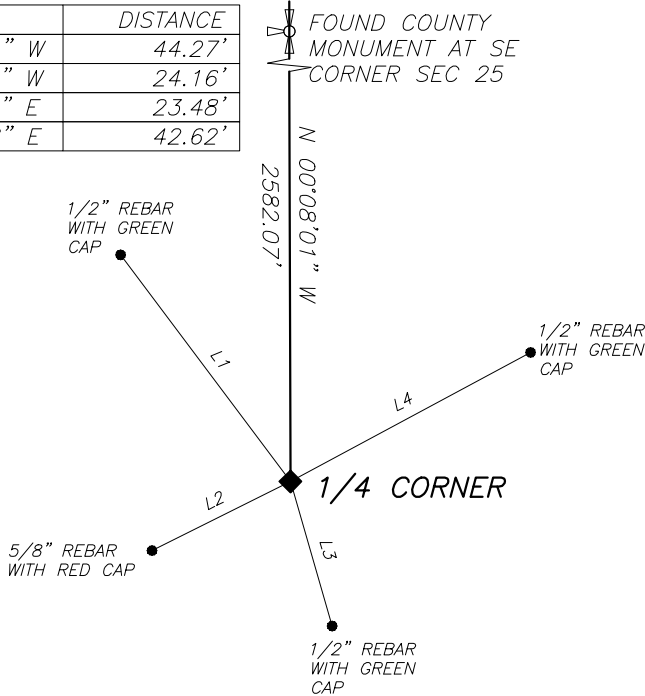

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°17'10.77708"N AND LONG. 110°16'30.42365"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER



DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL STONE IN MOUND OF STONES AT POSITION OF 1/4 CORNER WITH ONE 5/8" BAR WITH RED CHEWED UP CAP REFERENCE MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8"x24" REBAR WITH DUCHESNE COUNTY 2 1/2" DIA. ALUMINUM CAP AT CORNER WITH STONE ALONGSIDE TOGETHER WITH REFERENCE MONUMENTS AS SHOWN



PHOTO OF MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7267325.929
E: 1982231.034
NAVD88 EL: 6094.99'

LATITUDE: 40°15'51.35174" N
LONGITUDE: 110°16'30.29614" W
ELLIPSOID HEIGHT: 6039.08'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0040W0_100140



PHOTO OF MONUMENT FACING SOUTHWEST

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 20 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

